

# 78 Interior room furnishings

NSC.72 & XB Window sills and furnishing in homes

*Post installation  
fixtures and fittings  
in housing*

Pre-conditions

Preparation

Self-inspection

Execution



This **work instruction** is designed for use in detailed planning and preparation of work on construction projects. With thorough planning high levels of personal safety and optimal work apportionment can be achieved at the same time as the work can be organized efficiently and cost effectively.

Safety — Risk assessment

Work activity & Problem	P	C	Risk= P*C	Action
Overloading, stretching	10	50	500	Use transport and lifting aids
Cluttered workplace =Twisting or fall injuries	3	70	210	Regular tidying
Sawing and Drilling	0,5	100	50	

Probability = P  
Consequence = C  
Risk = P \* C

**Assessment of probability**  
 P = 0,1 Very unlikely (<1 times/10 years)  
 P = 1 Unlikely (1 times/10 years)  
 P = 3 Low probability (1 times/3 years)  
 P = 10 Relative probability (1 times/year)  
 P = 30 Probable (1 times/month)

**Assessment of consequences**  
 C=0,5 Trifle  
 C=1 Tiny ( 1 - 2 days sick leave)  
 C=5 Small ( 3 - 7 days sick leave)  
 C=15 Tactile ( 8 - 29 - " - )  
 C=70 Severe (30-299 - " - )  
 C=500 Very severe (>300 - " - )

## Equipment and materials

### Basic equipment:


- Measuring tape or yardstick
- Marking pen
- Hammer
- Circular saw
- Battery-driven drill, screwdriver
- A hammer drill for concrete walls
- Bench/table saw, miter saw
- Sandpaper
- Vacuum
- Garbage bag
- Trailer for the transport of cupboards etc

### Materials:

- Storage: Wardrobes, medicine and cleaning cupboard
- Bathroom Furnishings: Bathroom cabinet, mirror, hangers
- Hall furnishings: Hat rack
- Window sills on brackets or inlaid
- Miscellaneous: Door stops
  
- Nail Plugs
- Screws and nails
- The bathroom - Silicone

### If the customer accepts:

- Compressors and nail guns

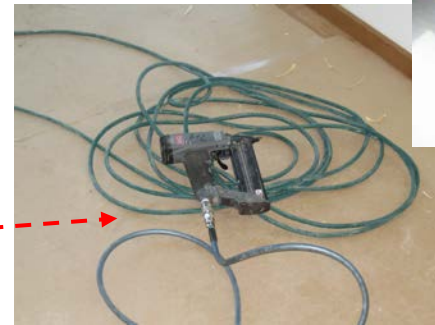

***Unloading, site transport and storage***

Interior furnishings are fragile, theft-prone and requires dry and warm spaces for storage.

There will be a lot of packaging – Shall the carrier unpack the goods and take the packing material by return?




## Template &amp; instructions

No	Check	Method or equipment	Frequency	Result	Date Signature	Deviation/Remedy Approval/Non-A
1	Fasteners fulfil requirements according to ZSE in AMA Hus	Ocular	Before Starting			
2	Screws and nuts to be fitted with washers when securing to wood	"	After mounting			
3	Marks after mounting	"	After mounting			
4	Brackets function	Test	After mounting			
5						
6						
7						
8						
9						
10						
11						

## Key points

## Quality criteria for the project and the product

- Study Drawings, Specifications and Inspection planning
- Think through the alternative **methods of production** and handling of materials, tools etc. that can meet the requirements

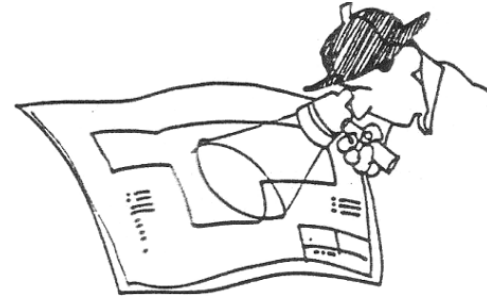

### *Pay particular attention to*

- Attach fittings as described in the Specification and in accordance with the manufacturer's instructions
- Check the labelling on the furnishing units - so they end up in the right place
- Do not mount damaged units

## Cabinet joinery

**Fitted wardrobes, bathroom cabinets, cleaning and medicine cabinets**

Older method below with cabinets that are placed on a site made plinth.

To the right the adjustable plastic legs are complemented with a base attached to them with 'snap-fasteners' on the legs.

When fixing against plaster walls, strengthening studs are required.

Two screws up and two down.



## Window sills

Of wood, laminate and stone on consoles.

Window sills of stone can also be built in to the wall.





## Shelves

Shelves on plaster walls require reinforcement in the frame.  
To the right: shelves in the closet.





## Bathrooms and toilets

The fittings consist of mirrors, cabinets, toilet paper rolls and hangers.

Sealant type of bathroom silicone are usually required.

Handle for bath requires reinforcement.



## Other items

In the bathroom, there may be a shower curtain rail.

All the more common with mailboxes at the entrance and a magazine rack at the front door.

